


**CONSTRUCTION NOTES**

1. ALL WIRES SHALL BE 22 AWG TEFLON COATED
2. TWISTED WIRES SHALL HAVE 8-10 TWIST'S PER INCH
3. HEATSHRINK SHALL BE USED TO TERMINATE THE SNAKESKIN AT THE BASE OF EACH DSUB CONNECTOR
4. TIE SHEILDS TOGETHER AND TERMINATE AT THE INTERCOM MASTER GND (PIN #1)
5. TIE SHEILDS TOGETHER AND TERMINATE AT INTERCOM GROUND

**SYMBOL KEY**

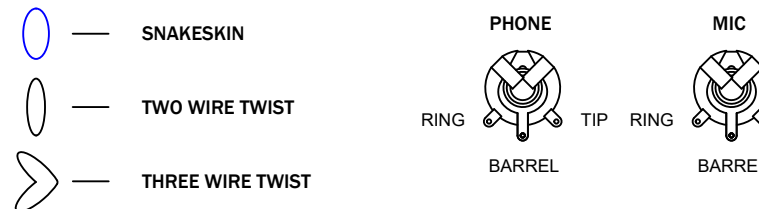

ITEM	QTY	PART #	DESCRIPTION
NOTES:			
PHONE: (503) 263-0037 FAX: (503) 263-1138 320 REDWOOD ST Canby, OR 97013			
DATE 6/19/14		SCALE NONE	
DRN RJB	APPR. R/JH		
This drawing is the property of Advanced Flight Systems Inc. and contains confidential information. It is not to be copied, reproduced or used without written approval.			
TITLE INTERCOM HARNESS			P/N 57,600S A 5

REV	DATE	DESCRIPTION	REV BY
5	2/21/19	Reorganized shield and LED on jack side of harness	SR
2	3/4/15	ADDED COLOR CODE	RB
1	6/19/14	Initial Drawing	RB