
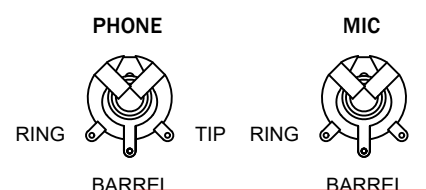


CONSTRUCTION NOTES

1. ALL WIRES SHALL BE 22 AWG TEFLON COATED
2. TWISTED WIRES SHALL HAVE 8-10 TWIST'S PER INCH
3. HEATSHRINK SHALL BE USED TO TERMINATE THE SNAKESKIN AT THE BASE OF EACH DSUB CONNECTOR
4. TIE SHEILDS TOGETHER AND TERMINATE AT THE INTERCOM MASTER GND (PIN #1)
5. TIE SHEILDS TOGETHER AND TERMINATE AT INTERCOM GROUND

SYMBOL KEY

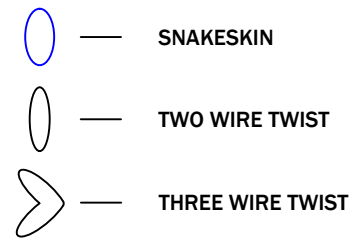

***Intercom EFIS Audio R+L Connected**

REV	DATE	DESCRIPTION	REV BY
1	1/31/24	Initial Drawing	IRB

ITEM	QTY	PART #	DESCRIPTION
NOTES:			
<p>ADVANCED FLIGHT SYSTEMS INC.</p> <p>PHONE: (503) 263-0037 FAX: (503) 263-1138</p> <p>320 REDWOOD ST CANBY, OR 97013</p>			
DATE	1/31/24	SCALE	NONE
DRN	IRB	APPV	RJH
<p>This drawing is the property of Advanced Flight Systems Inc. and contains confidential information. It is not to be copied, reproduced or used without written approval.</p>			
TITLE	ACM to Dynon Intercom Dual COM Support AFS	P/N	57620-AFS
REV			1