

SYMBOL KEY



Optional OAT

CUSTOMER POPULATED

DAVTRON


CONSTRUCTION NOTES

1. ALL WIRES SHALL BE 22 AWG TEFLON COATED
2. TWISTED WIRES SHALL HAVE 8-10 TWIST'S PER INCH
3. HEATSHRINK SHALL BE USED TO TERMINATE THE SNAKESKIN AT THE BASE OF EACH DSUB CONNECTOR

AV-30

AV-30 DSUB-15


CONNECTOR - 50115F
BACKSHELL - 50115S
PINS - 50100F

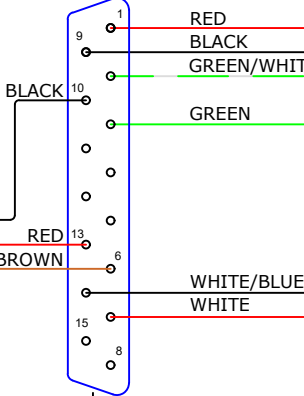

12" Customer Supplied 3 Cond Shielded 22ga 12"

OPTIONAL AV-MAG

CO Guardian




24"

AFS Control Module

Backup EFIS + Spare Device

CONNECTOR - 50,109M
BACKSHELL - 50,109S
PINS - 50,100M

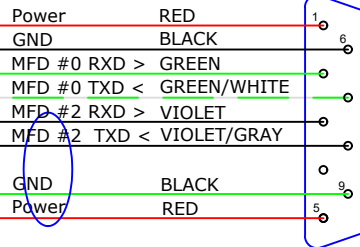

NOTE #2

LENGTHS

	AV-30
RV-7	
RV-8	
RV-10 AEROSPORT	
RV-10	

4	3/14/2024	Added Remote MAG Cable	RJH
1	1/20/2021	Initial Drawing	RJH
REV	DATE	DESCRIPTION	REV BY

ITEM QTY PART # DESCRIPTION

NOTES:

DATE 1/20/21 SCALE NONE

DRN: RJH APPR: RJH

This drawing is the property of Advanced Flight Systems Inc. and contains confidential information. It is not to be copied, reproduced or used without written approval.

TITLE ACM to AV-30 Harness P/N 57313 A 4

ADVANCED FLIGHT SYSTEMS INC.

PHONE: (503) 263-0037 FAX: (503) 263-1138
320 REDWOOD ST
CANBY, OR 97013